



DIGITAL PORTABLE SUBMERSIBLE

DENSITY/SPECIFIC GRAVITY/CONCENTRATION METER

DM-250.1

IN PROCESS TO EXCELLENCE


Specifications

Measuring range:	
Density	0... 3 g/cm ³ (0... 3000 kg/m ³)
Density Standard	0.6... 1.2 g/cm ³ (600... 1200 kg/m ³)
Temperature	-40... +85°C (-40... +185°F)
Accuracy:	
Density	±0.0003 or ±0.0005 g/cm ³ (±0.3 or ±0.5 kg/m ³)
Temperature	±0.2°C (±0.4°F)
Repeatability:	
Density	±0.00015 or ±0.00025 g/cm ³ (±0.15 or ±0.25 kg/m ³)
Temperature	±0.1°C (±0.2°F)
Resolution:	
Density	0.0001 g/cm ³ (0.1 kg/m ³)
Temperature	0.01°C (0.02°F)
Supported measuring units	Real density: g/cm ³ , kg/m ³ , lb/gal, lb/ft ³ ; API; SG Referred density: at 15°C, 20°C, 60°F; API60; SG60 Tables ASTM D1250 Alcohol tables Temperature in °C or °F
Ambient temperature	-40... +85°C (-40... +185°F)
Depth of submersion	Up to 6 meters
Intrinsically safe:	
Controller	ATEX II (2G) EEx ib [ia] IIB T4
Sensor	ATEX II 1G EEx ia IIB T4
Power supply	NiMH 3.6V-1200 mAh
Operating time without charging	Appr. 12 hours
Dimensions, weight:	
Controller	180 x 80 x 40 mm (7.1 x 3.2 x 1.6 in), 0.6 kg (1.3 lb)
Sensor	220 x ø42 mm (8.7 x ø1.7 in), 1 kg (2.2 lb)
Temperature compensation	Automatic
Viscosity compensation	Automatic
Data handling	Backlighted LCD display Local memory for 998 results with date/time stamped Build in bluetooth for data transfer to printer or PC Optional Windows - based software
Delivery	Delivered in compact carrying case

Able to download the measurements to PC;
Multifunctional software allows to proceed the
measurements results in user-convenient form;
Compatible for a Windows 98/ME/2000/NT/XP.

Immediately printout the measurements;
No need for PC.

Remote data transfer;
Useful in field conditions;
Software for data processing.

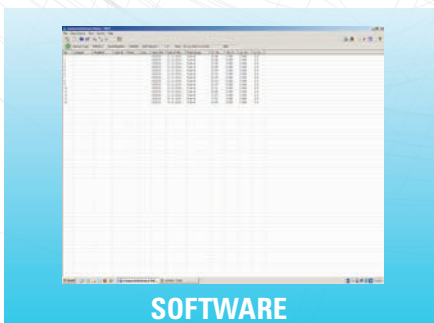

SOFTWARE



BLUETOOTH PRINTER



POCKET PC

Advantages

- Direct density measurement
- Record spot density and average per tank
- Automatic temperature compensation
- No sampling required
- ATEX Hazloc certification
- Safe operation, low maintenance
- At any depths up to 6 meters
- They're economical and easy to operate
- Measures highly viscous liquids up to 2000 cP
- Rigid construction for heavy duty outdoor operation
- Local results storage and Bluetooth data transfer

Applications

- Petroleum industry
- Ethanol production
- Food & Beverages
- Chemical industry
- Cosmetic industries
- Pharmaceutical industry

For more information please visit www.lemis-process.com



USA
LEMIS USA, Inc.
2121 Golden Road, Suite 2A
The Woodlands
TX 77380, USA
Ph.: +1 281 465 8441
Fax: +1 281 465 8224

EUROPE
AS LEMIS Baltic
26 Ganibu dambis
Riga, LV-1005
Latvia, EU
Ph.: +371 6738 3223
Fax: +371 6738 3270

INDIA
LEMIS India PVT LTD
802, Maithili's Signet, Plot-39/4
Sector-30A, Vashi
Navi Mumbai-400705, INDIA
Ph.: +91 22 67215655
Fax: +91 22 41232412

E-mail: info@lemis-process.com